



PRODUCT DESCRIPTION

- A system used to hold, fix, adjust, change, secure and block quickly
- Compact design with a simple and fast unlock with a button handle

APPLICATION

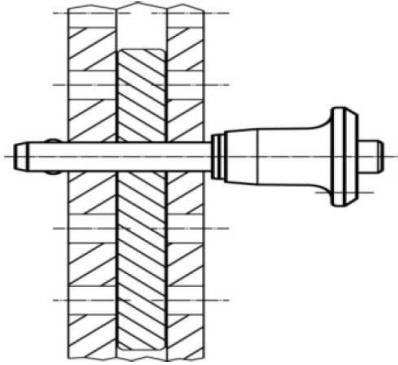

DRAWING

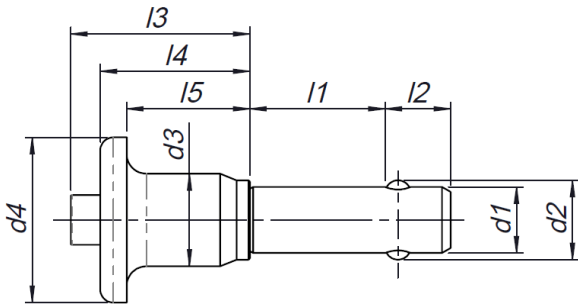

d1	l1	d2	d3	d4	l2	l3	l4	l5
8	12	9,5	14,1	25	6	27,3	22,6	18,6
-0,04 -0,08	+0,06				+1 -1			

Note: Measurements and tolerances in this table are given in mm.

MATERIALS

- **AXIS :** Stainless steel 630 / 17-4 PH
- **HANDLE:** Aluminium 6061. The surface treatment is black cataphoresis

SPECIFICATIONS - METRIC

QRP DIA (mm)	DOUBLE SHEAR RESISTANCE Minimum (kN)*	RECOMMENDED HOLE DIAMETER (mm)	
		Maximum	Minimum
8	40	8,1	8

Note:

* Test Method Used: GB/T 13683-1192 by SGS-CSTC Standards Technical Services Co.