

## 2-way Passive Multipurpose Monitor

### FEATURES

- Shallow profile multipurpose wedged monitor (55°) design with four integrated handles
- Premium European High Efficiency custom IDEA Transducers and passive crossover board
- IDEA proprietary axisymmetric coherent spherical wave-front HF assembly
- 8 Ohm Passive
- Dual Neutrik NL4 connectors
- Durable Aquaforce paint, available in standard textured black or white.
- Optional RAL colors (on demand)
- Rugged and durable 15/18 mm birch plywood construction and finish
- 1.5 mm Aquaforce coated steel grille with internal protective foam
- 36 mm Pole mount cup and dedicated installation and rigging accessories



### APPLICATIONS

- High SPL A/V portable sound reinforcement
- FOH for rehearsal rooms, medium performance venues and clubs
- FOH and Stage monitors for Regional Touring and Rental Companies
- Stage monitors, Side-fills, Front-fills or In-fills for Touring-Sound



### OVERVIEW

**EX015** is a high performance, full range 2-way passive monitor conceived for professional environments where portable sound reinforcement is required delivering a superior audio reproduction in a high performance, multipurpose format.

**EX015** HF assembly couples a 3" compression driver into common **EXO** Series birch plywood axisymmetric horn with IDEA's proprietary design and a premium European, dedicated-design passive crossover filter provides a smooth, natural transition into the MLF 15" woofer and summing up into a full-range superior audio playback along the whole usable frequency range from 18 kHz down to 50 Hz.



Like all IDEA models, **EX015** is built with 15 and 18 mm birch plywood, IDEA's Aquaforce waterproof paint coating and a high quality steel grille, creating a rugged, durable and stylish loudspeaker. The wedged cabinet allows not only to be used as FOH main system in small venues, bars and AV applications but also as a stage monitor but to seamlessly fit into any wall mount fixed installation.

**EX015** integrates a bottom 36 mm pole mount socket to be configured on **BASSO** Series subwoofers for portable sound reinforcement and medium performance venues and clubs. **EX015** cabinet design features a 60° wedge profile to be used as floor monitor and properly aimed to the performer's ears on stage.




## TECHNICAL DATA

<b>Enclosure design</b>	Wedged
<b>LF Transducers</b>	1 x 15" High performance woofer
<b>HF Transducers</b>	3" Voice coil Compression Driver
<b>Power Handling (RMS)</b>	500 W
<b>Nominal Impedance</b>	8 Ohm
<b>SPL (Continuous/Peak)</b>	127/133 dB SPL
<b>Frequency Range (-10 dB)</b>	75 - 23000 Hz
<b>Frequency Range (-3 dB)</b>	105 - 21000 Hz
<b>Coverage</b>	80° Axisymmetric
<b>Dimensions (WxHxD)</b>	410 x 729 x 368 mm (16.1 x 28.7 x 14.5 in)
<b>Weight</b>	274 kg (60.4 lb)
<b>Connectors</b>	2 x Neutrik speakOn NL-4 in parallel
<b>+/-1</b>	Input
<b>+/-2</b>	Link
<b>Cabinet Construction</b>	15 + 18 mm Birch Plywood
<b>Grille</b>	1.5 mm perforated weatherised steel with protective foam
<b>Finish</b>	Durable IDEA proprietary Aquaforce High Resistance paint coating process
<b>Handles</b>	2 integrated handles
<b>Feet/Skates</b>	4+3 Rubber feet
<b>Installation</b>	10 threaded M8 inserts. Bottom 36 mm pole mount socket
<b>Accessories</b>	U-Bracket vertical (UB-E15-V) U-Bracket horizontal (UB-E15-H) Pole (K&M-21336)

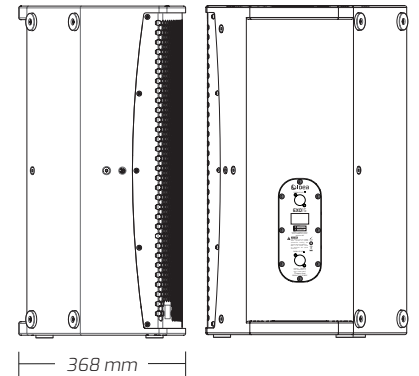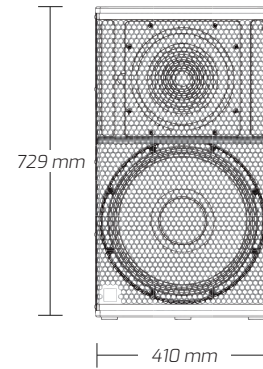

## ACOUSTICAL MEASUREMENTS


### FREQUENCY RESPONSE

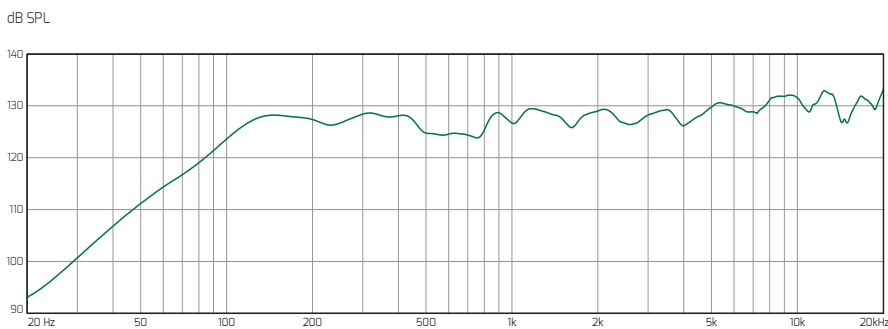










This graph shows the frequency response for a 1-watt swept sine signal in an anechoic environment (4pi), measured at 3 m and scaled down at 1 m.

In order to provide more precise information for acoustical analysis, a 1/12 octave smoothing has been applied.

### IMPEDANCE

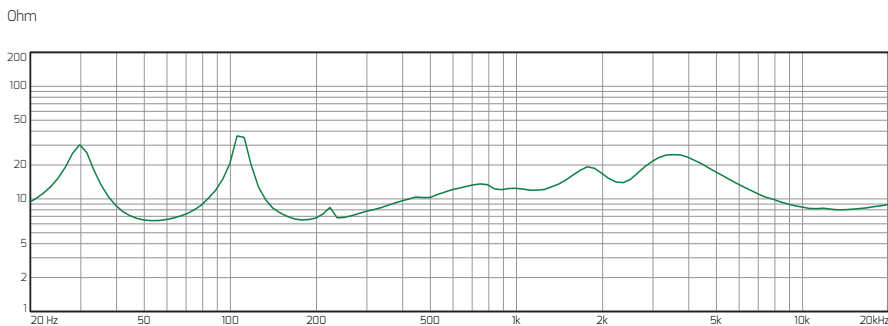

# HORIZONTAL 1/3 OCTAVE POLARS

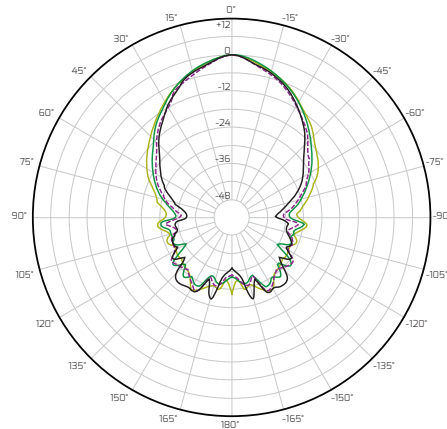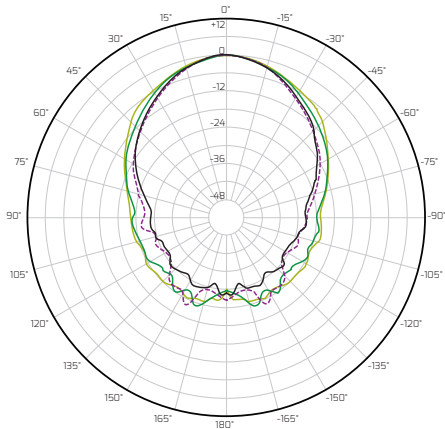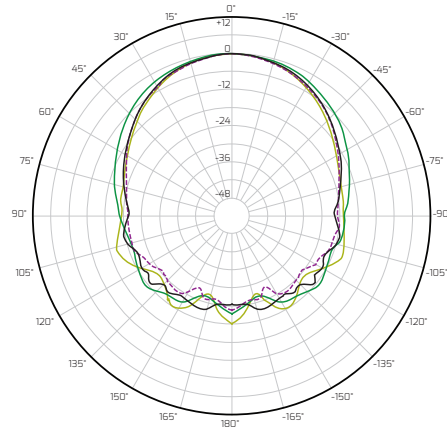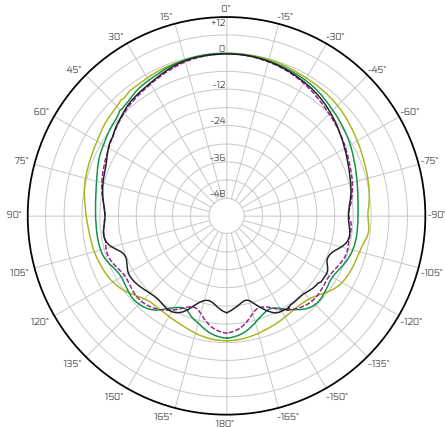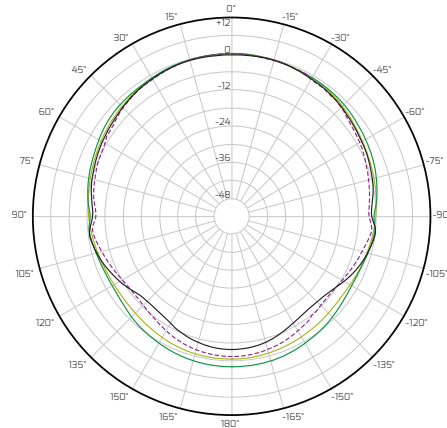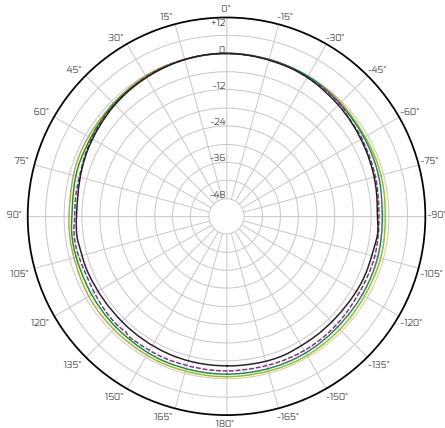

VERTICAL 1/3 OCTAVE POLARS

